
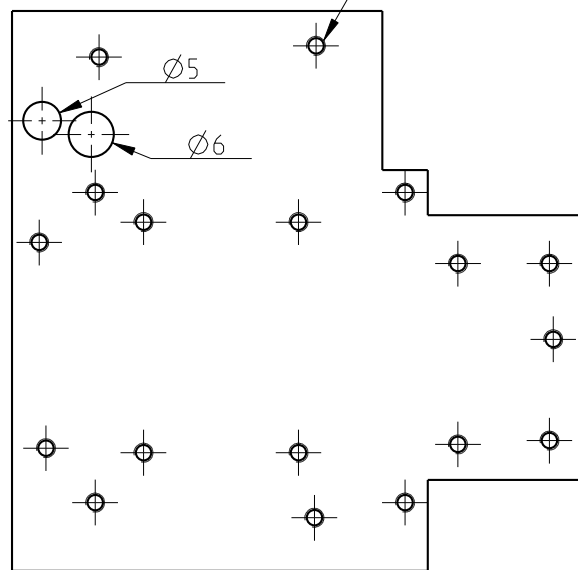


M2.5x.45 ISO - H TAP THRU
2.05 DRILL (2.050) THRU -(1) HOLE

18x

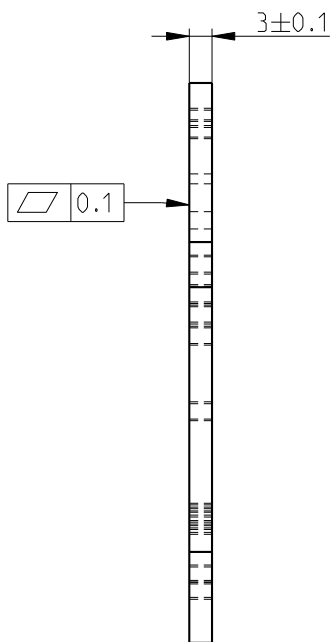

All tolerances: $\pm t/2$, $-t/2$, $-t/2$ All edges: $0,2 \times 45^\circ$ (unless otherwise specified)

According ISO 2768-1-f	Tolerance $\pm t/2$	± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	$\pm 0.1^\circ$
	Dimension range	0.5-3	3-6	6-30	30-120	120-400	400-1000	Angular
X		X	Copper		X		Use tol. -t/2 for outside and +t/2 for inside dimensions.	
Part Description		Q.	Material		Dimensions			
Designer		Date	Scale	Size				
Angel Marinov		18-Feb-10	1 / 1	A4				
X		X	Projection					
File	COPPER_PLATE				Project name			Rev.
ESD #	X				Project number			1.2
Class	X				Part name		COPPER_PLATE	