


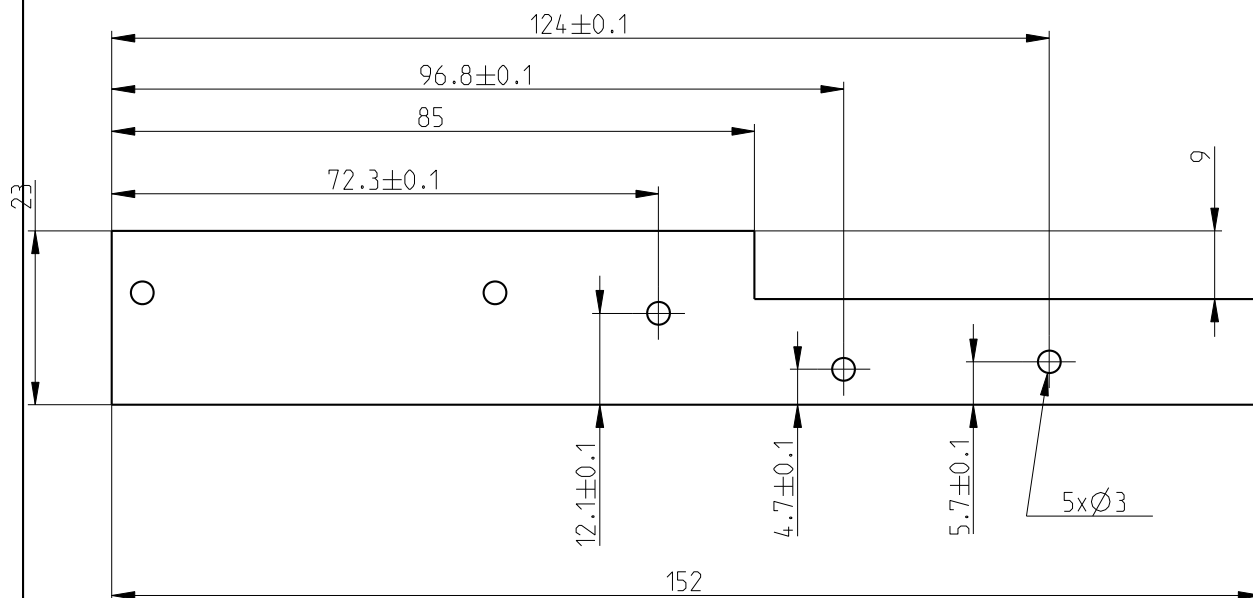

All tolerances: $\pm t/2$, $-t/2$, $-t/2$ All edges: $0,2 \times 45^\circ$ (unless otherwise specified)

According ISO 2768-1-f	Tolerance $\pm t/2$	± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	$\pm 0.1^\circ$
	Dimension range	0.5-3	3-6	6-30	30-120	120-400	400-1000	Angular
X		X	Copper		X		Use tol. -t/2 for outside and +t/2 for inside dimensions.	
Part Description		Q.	Material		Dimensions			
Designer	Date	Scale	Size					
Angel Marinov	13-Dec-09	1 / 1	A4					
X	X	Projection						
File	STRIP1_1			Project name		Rev.		
ESD #	X			Project number		1.0		
Class	X			Part name		STRIP1 Sheet 1/1		