


1.25 (✓)

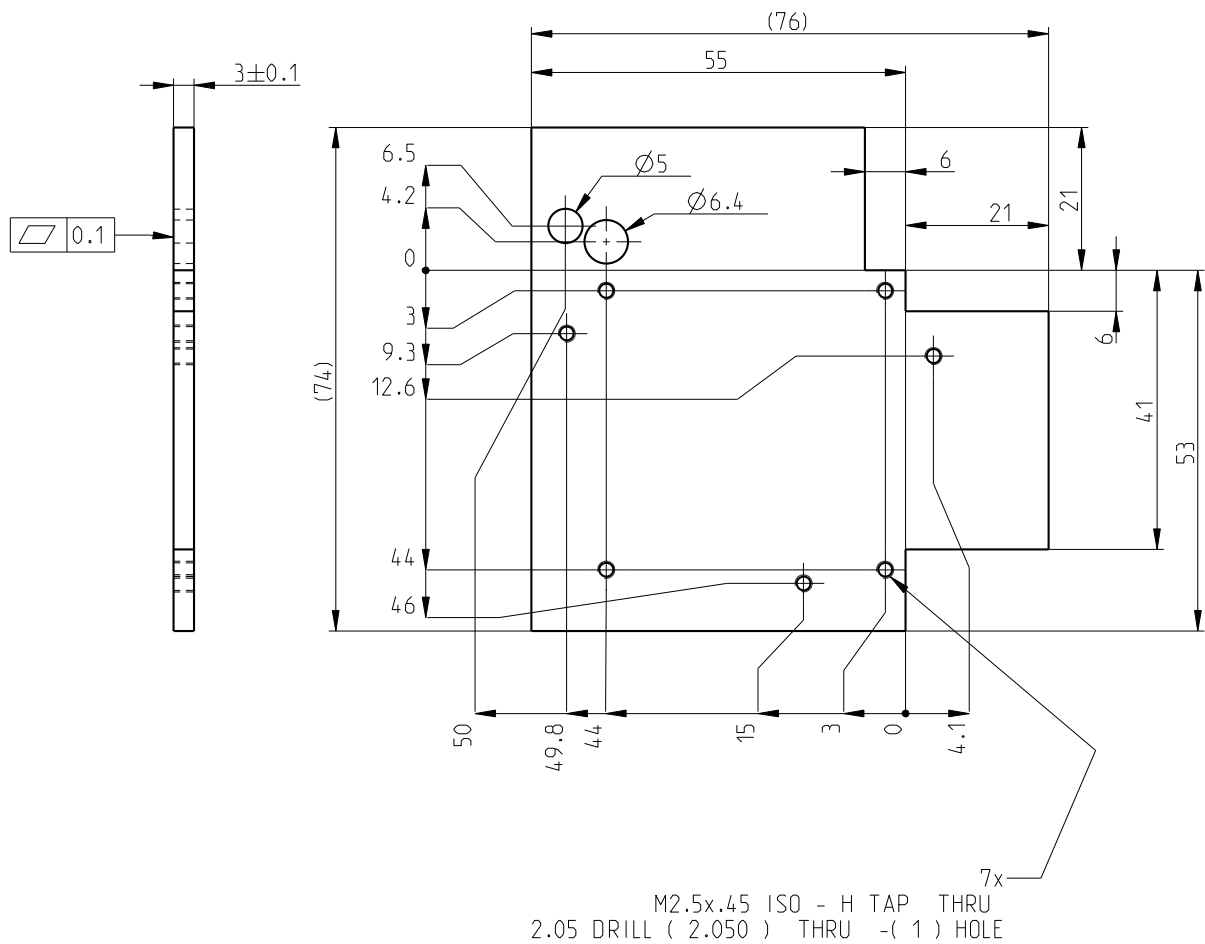

All thread hole positions tolerance - ± 0.1

All tolerances: $\pm 1/2$, $-1/2$, $-1/2$ All edges: $0.2 \times 45^\circ$ (unless otherwise specified)

According ISO 2768-1-f	Tolerance $\pm 1/2$	± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	$\pm 0.1^\circ$
	Dimension range	0.5-3	3-6	6-30	30-120	120-400	400-1000	Angular
X		X	C10100 (99.99% copper)		X		Use tol. -1/2 for outside and +1/2 for inside dimensions.	
Part Description		Q.	Material		Dimensions			
Designer		Date	Scale	Size	A S M E			
Angel Marinov		11-Feb-11	1 / 1	A4				
X		X	Projection					
File	VGA_COPPER_HEATSINK				Project name		C90S	Rev.
ESD #	X				Project number		1	2.0
Class	X				Part name		VGA_COPPER_HEATSINK	Sheet 1/1