


1.25 / (✓)

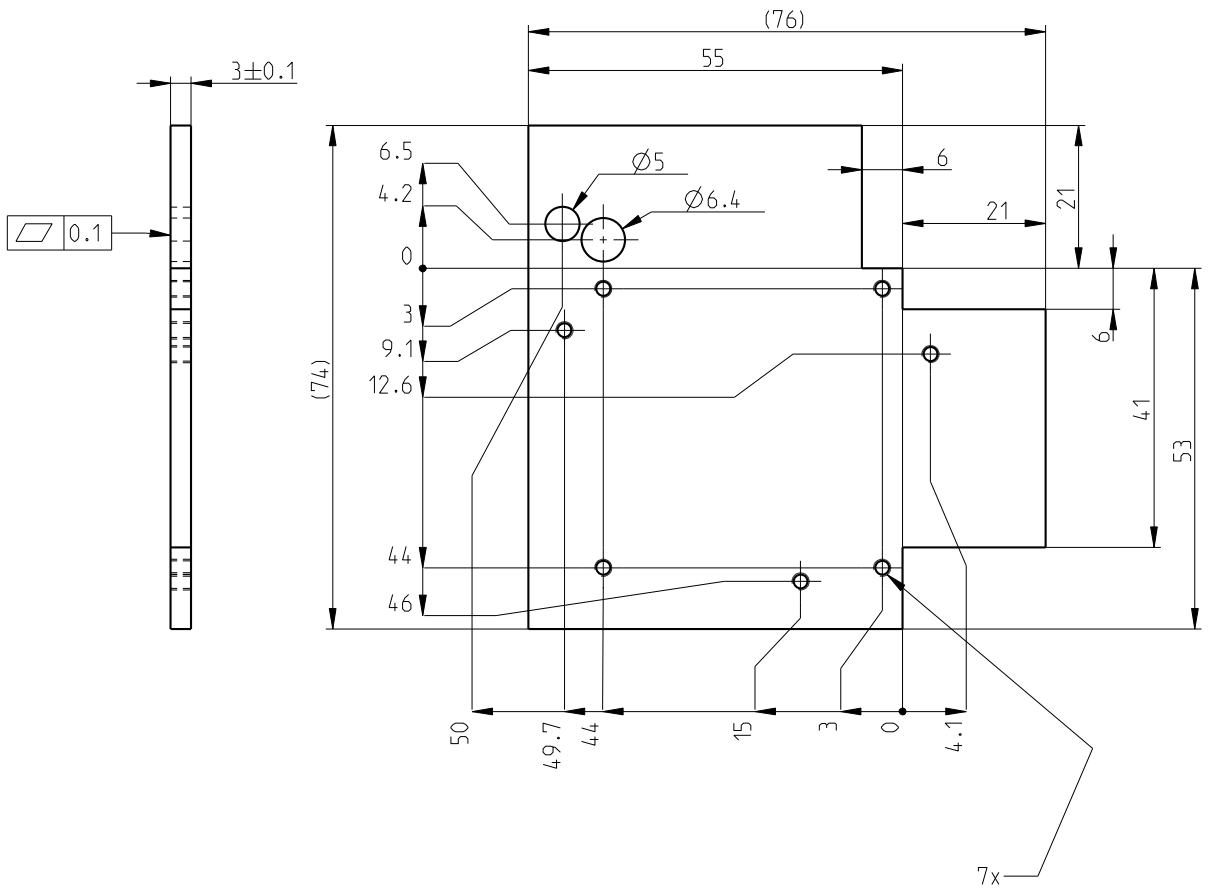

M2.5x.45 ISO - H TAP THRU
2.05 DRILL (2.050) THRU - (1) HOLE

All thread hole positions tolerance - ±0.1

All tolerances: ±t/2, -t, -t All edges: 0,2x45° (unless otherwise specified)

According ISO 2768-1-f	Tolerance ±t/2	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.1°	
	Dimension range	0.5-3	3-6	6-30	30-120	120-400	400-1000	Angular	
X		X	C10100 (99.99% copper)		X		Use tol. -t/2 for outside and +t/2 for inside dimensions.		
Part Description		Q.	Material		Dimensions				
Designer		Date	Scale	Size		A S M E			
Angel Marinov		13-Feb-11	1 / 1	A4					
X		X	Projection						
File	VGA_COPPER_HEATSINK				Project name	C90S		Rev.	
ESD #	X				Project number	1		4.0	
Class	X				Part name	VGA_COPPER_HEATSINK		Sheet 1/1	